



常州市迈峰机械制造有限公司

- 服务宗旨 把满意加给客户
- 服务承诺 质优量准 安全便捷
- 经营理念 靠诚信经营 靠品牌增值
靠管理创效 靠人才发展



 **常州市迈峰机械制造有限公司**
Changzhou Maifeng Machinery Manufacturing Co., Ltd.

☎ 0519-88793379
☎ 0519-88793379
☎ 沈飞虎 15961453678
18661175999
✉ 840087985@qq.com
📍 常州市武进区洛阳镇新科西路23号
No. 23 Xinke Road, Luoyang Town, Wujin District, Changzhou
🌐 www.czmaifeng.com

01

企业简介

Enterpri Enterprise Idease Idea

我公司是专业研发生产纺织经编机及簇绒人造草坪机为一体的多元化新生代企业，坐落在江南水乡——“龙城”常州，凭借其雄厚的资金和技术实力在经编机及工程建筑机械行业取得了很好的发展。公司现已引进国内外先进的生产设备及工艺，建立了完善的质量保障制度，同时向更高新的技术领域发起冲击。

► 我公司先主要经营项目有：

迈峰经编机系列：

- MFDM-II高速双针床遮阳网经编机
- MFDM-I高速双针床网眼袋经编机
- MFDM-高速单针床渔网经编机
- MFDM-288A型(系列)双针床中短绒经编机
- MFHB-33(43)多梳栉花编机
- 人造草坪机（1-4米）

我公司产品销售遍布全国各地，并远销印度，迪拜，尼日利亚，越南，俄罗斯，哈萨克斯坦，泰国等国家，深得广大用户的好评。我们的产品不断综合国内外同类产品的特点，并本着以客户之需求为中心，进行研究，开发和制造。

公司以“**诚信、创新、奋进、和谐、发展**”的方针走下去，“**用价格竞争市场，用服务巩固市场，用新型产品开拓市场**”的营销理念进行多元化的发展。必定能为客户创造一个服务于己的工厂，您的需求是我们的追求，您的建议是我们的方向，您的鼓励更是我们不断前行的动力。愿与您携手共创美好明天！

Our company is a diversified new generation enterprise specializing in the research and production of textile warp knitting machines and tufted man-made lawn machines. It is located in Changzhou, Longcheng, a water town in the south of the Yangtze River. With its strong financial and technical strength, it has made good progress in the warp knitting machine and construction machinery industry. The company has introduced advanced production equipment and technology at home and abroad, established a sound quality assurance system, and launched a shock to the higher and new technology fields.

► **My company's main business projects are:**

Maifeng warp knitting machine series:

- MFDM-II high speed double needle bar warp knitting machine net(shading net)
- MFDM-I high speed double needle bar warp knitting machine(mesh bags).
- MFDM- high speed single bed nets warp knitting machine
- MFDM-288A double bar (villi,linter)warp knitting machine
- MFHB-33 (43) multi comb flower knitting machine
- Artificial lawn mower (1-4m)

Our products are sold throughout the country, and exported to India, Dubai, Nigeria, Vietnam, Russia, Kazakhstan, Thailand and other countries, won the majority of users. Our products continue to integrated the characteristics of similar products at home and abroad, and in line with the needs of customers as the center, research, development and manufacturing.

Company to "integrity, innovation, forge ahead, harmony, development," the principle of going down, "with the price of the market, with the service to consolidate the market, with new products to open up the market," the marketing concept of diversified development. Must be able to create a service for our customers, your demand is our pursuit, your suggestion is our direction, your encouragement is our constant power. Willing to work with you to create a better tomorrow!

人造草坪机整套

- 人造草坪机：
小草（适用于工程围挡，盖土等等）（草高0.7cm-2.0cm），密度可调14针-40针，中间距客户可自定义定制。

包括：主机、控制柜、操作踏板、纱架、机布架、摆布架、工具箱等。

- 主机：9KW 西门子变频电机
托布板草高调节位移升降（步进电机、位移尺、丝杆升降）。
主机：人造草坪机有效门幅（一米--四米，针距3/8（可定制）.转速：0-425转/分之间，生产草高：0.7~5.0厘米之间。
该机属单针梁，单针排平割绒机型。
前后大梁托布叉升降板采用铸件，箱体为结构件。
主传动：采用单头或两端驱动方式（7.5-11KW西门子变频电机两台），机器运转平稳。
导纱系统为：无极变速器加2台摆线针轮减速器（可选装伺服电机）。底布喂入为无级变速器或2台3KW伺服电机。
动力控制柜1台，点动、慢车启动、电子编码器计长等。




Man-made lawn machine set

- Artificial lawn machine:
Grass (suitable for engineering enclosure, covering soil, etc.) (grass height is 0.7cm-2.0cm), density can be adjusted by 14-40 needles, the middle distance can be customized by customers.

Including: main engine, control cabinet, operating pedal, yarn rack, machine cloth rack, swing rack, toolbox and so on.

- Host: 9KW Siemens Frequency Converter Motor
The tray grass can adjust its displacement (stepper motor, displacement ruler and screw).
Host: Man-made lawn machine effective door width (1-4 meters, needle spacing 3/8 (customizable). Speed: 0-425 rpm, production grass height: 0.7-5.0 cm.
This machine is a single needle beam, single needle row flat cutting machine.
The lifting plate of the supporting fork of the front and rear girder is made of castings and the box body is a structural part.
Main drive: single-end or two-end drive mode (7.5-11KW Siemens frequency conversion motor two), the machine runs smoothly.
The yarn guide system is: infinitely variable transmission plus 2 cycloidal pin-wheel reducers (optional servo motors). The bottom cloth is fed to CVT or two 3KW servo motors.
Power control cabinet, point, slow start, electronic encoder length, etc.

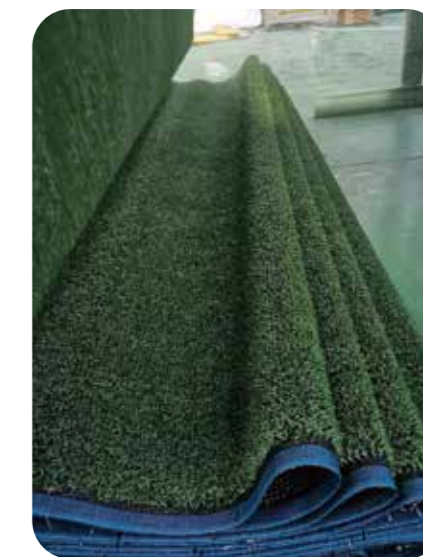

人造草坪机整套

- 人造草坪机系列：
大草（适用于长草运动草，装饰草等）（草高 2.0cm-5.0cm），密度针数可调，中间距客户可自定义定制。
包括：主机、控制柜、操作踏板、纱架、机布架、摆布架、工具箱等。



- 主机：9KW 西门子变频电机
托布板草高调节位移升降（步进电机、位移尺、丝杆升降）。
主机：人造草坪机有效门幅（一米--四米，针距3/8（可定制）.转速：0-425转/分之间，生产草高：0.7~5.0厘米之间。
该机属单针梁，单针排平割绒机型。
前后大梁托布叉升降板采用铸件，箱体为结构件。
主传动：采用单头或两端驱动方式（7.5-11KW西门子变频电机两台），机器运转平稳。
导纱系统为：无极变速器加2台摆线针轮减速器（可选装伺服电机）。底布喂入为无级变速器或2台3KW伺服电机。
动力控制柜1台，点动、慢车启动、电子编码器计长等。



Man-made lawn machine set

- Artificial lawn machine series:
Big grass (suitable for long grass sports grass, decorative grass, etc.) (grass height 2.0cm-5.0cm), adjustable density needle number, customized distance between customers.
Including: main engine, control cabinet, operating pedal, yarn rack, machine cloth rack, swing rack, toolbox and so on.
- Host: 9KW Siemens Frequency Converter Motor
The tray grass can adjust its displacement (stepper motor, displacement ruler and screw).
Host: Man-made lawn machine effective door width (1-4 meters, needle spacing 3/8 (customizable). Speed: 0-425 rpm, production grass height: 0.7-5.0 cm.
This machine is a single needle beam, single needle row flat cutting machine.
The lifting plate of the supporting fork of the front and rear girder is made of castings and the box body is a structural part.
Main drive: single-end or two-end drive mode (7.5-11KW Siemens frequency conversion motor two), the machine runs smoothly.
The yarn guide system is: infinitely variable transmission plus 2 cycloidal pin-wheel reducers (optional servo motors). The bottom cloth is fed to CVT or two 3KW servo motors.
Power control cabinet, point, slow start, electronic encoder length, etc.



MFSM-高速双针床遮阳网经编机

用途 主要用于生产遮阳网，防尘网，盖土网，包装网眼袋，菱形网等等

产品特点

- 1.开式凸轮传动，结构简单，操作便利，工作稳定；
- 2.机器重且重心低，确保机器的安全操作；
- 3.低噪声，低振动；
- 4.所生产的网眼袋一次成型，不需要缝纫。可自动织筋、锁边、穿绳；
- 5.可选配手提装置。

技术参数

- 机号E2,E3,E4,E5,E6 (针数/英寸)
- 针型舌针 (针块式)
- 工作门幅170" (4500MM),212" (5500MM),258" (6500MM) ,270" (6800MM)
- 梳栉数9把
- 主轴转速350-500
- 送经机构三辊罗拉积极送经
- 卷取机构独立卷取
- 横移机构编花盘

机 型	主电机功 (kw)	机器尺寸 (mm)	安装尺寸(mm)及占地面积	整机重量 (kgs)
MFD170	4kw	6200×1500×2300	7000×7000 ; 49M ²	8000
MFD216	5.5kw	7200×1600×2300	8000×7000 ; 56M ²	10000
MFD258	7.5kw	8200×1600×2300	9000×7000 ; 63M ²	11000
MFD270	7.5KW	8900×1600×2300	9000×7000 ; 63M ²	11500
MFD330	11KW	10200×1700×2400	11200×7000 ; 78.4M ²	19000

备注：设备以212英寸计算，24小时工作可生产50*80CM 网袋1万个左右。



MFSM-I double needle bar warp knitting machine (mesh bags)

Use mainly used in the production of onions, potatoes and other vegetables and Fruits packaging mesh bags

Product features

1. open cam drive, simple structure, easy operation, stable operation;
2. machine component and low center of gravity, to ensure the safe operation of the machine;
3. low noise and low vibration;
4. Mesh bag molding, without sewing. Automatic sewing, rope, fabric reinforcement;
5. optional portable device.

Technical parameters

- E2, E3,E4,E6 (PIN number per inch).
- Needle type needle (needle)
- Work door 170 (4500MM), 212 (5500MM), 258 (6500MM), 270 (6800MM),330(8500MM)
- 9 the number of comb
- Spindle speed 350-500
- By a group composed of three rollers , Actively send the
- Coiling mechanism independent coiling

Model	Main motor power (kw)	Machine size (mm)	Installation size (mm) and floor area	Machine weight (kg)
MFD170	4kw	6200×1500×2300	7000×7000 ; 49M ²	8000
MFD216	5.5kw	7200×1600×2300	8000×7000 ; 56M ²	10000
MFD258	7.5kw	8200×1600×2300	9000×7000 ; 63M ²	11000
MFD270	7.5KW	8900×1600×2300	9000×7000 ; 63M ²	11500
MFD330	11KW	10200×1700×2400	11200×7000 ; 78.4M ²	19000



MFDM 系列高速单针床经编机

用途 主要用于遮阳网、建筑防护网、防风网、防虫网、防鸟网、防冰雹网、橄榄网、捆草网等一些列网状织物，是针织行业的理想织机。由于其生产的网制品种类和样式较多，更适合经常变换花型的客户。

产品特点

1. 开式凸轮传动，结构简单，操作便利，工作稳定；
2. 机器分量重且重心低，确保机器的安全操作；
3. 低噪声，低振动；

技术参数

机号	E2,E3,E4,E6,E7,E9,E12(针数/英寸)
针型	舌针 (嵌式舌针或舌针块)
工作门幅	170" (4500MM), 212" (5500MM), 258" (6500MM), 264" (6700MM), 330" (8500MM), 430" (11000MM), 510" (13000MM)
梳栉数	2.4把
主轴转速	350-500

机型	主电机功 (kw)	机器尺寸 (mm)	安装尺寸(mm)及占地面积	整机重量 (kgs)
SRM170	4	6000×1500×2000	7000×7000 ; 49M ²	8000
SRM212	4	7200×1600×2000	8000×7000 ; 56M ²	10000
SRM258	4	8200×1600×2000	9000×7000 ; 63M ²	11000
SRM264	4	8300×1600×2000	9000×7000 ; 63M ²	11500
SRM330	5.5	10100×1700×2200	11200×7000 ; 78.4M ²	19000
SRM430	7.5	12500×1700×2200	13500×7000 ; 94.5M ²	22000
SRM510	7.5	14500×1700×2200	15500×7000 ; 108.5M ²	26000



MFDM series high speed single needle bar warp knitting machine

Use mainly used for shade net, building safety net, windbreak, insect nets, anti bird netting, anti hail nets, olive, bale net some mesh fabric, knitting industry ideal loom. Because of its production of network products and style more, more suitable for frequent transformation of the customer.

Product features

1. open cam drive, simple structure, easy operation, stable operation;
2. machine component and low center of gravity, to ensure the safe operation of the machine;
3. low noise and low vibration;

It can be woven polyester, cotton, polyester, polyester low elastic circular wire and so on as raw material of plastic products.

Technical parameters

Machine No	E2,E3,E4,E6,E7,E9,E12(Pin number per inch)
Needle	Pin (pin or tongue)
Working door	170" (4500MM), 212" (5500MM), 258" (6500MM), 264" (6700MM), 330" (8500MM), 430" (11000MM), 510" (13000MM)
Comb number	2 . 3 . 4 . 5 . 6
Spindle speed	350-500rpm

Model	Main motor power (kw)	Machine size (mm)	Installation size (mm) and floor area	Machine weight (kg)
MFDM170	4	6000×2000×2300	7000×7000 ; 49M ²	8000
MFDM212	4	7200×2000×2300	8000×7000 ; 56M ²	10000
MFDM258	4	8200×2000×2300	9000×7000 ; 63M ²	11000
MFDM264	4	8300×2000×2300	9000×7000 ; 63M ²	11500
MFDM330	5.5	10100×2000×2300	11200×7000 ; 78.4M ²	19000
MFDM430	7.5	12500×2000×2300	13500×7000 ; 94.5M ²	22000
MFDM510	7.5	14500×2000×2300	15500×7000 ; 108.5M ²	26000



MFSM-288A型双针床中短绒经编机

用途

织物经整理加工，剖割后能形成绒毛高度为5—25mm 的中绒织物，绒毛丰满、柔和、毛纱线因成圈而不易从底布脱落的特点，广泛应用于毛绒玩具、毛皮外衣、地毯、毛毯等毛绒类产品，如法莱绒、珊瑚绒、麒麟绒、圈圈绒、PV绒、仿真毛皮等。

产品特点

全部采用油浸式凸轮机构，使凸轮减少磨损，经久耐用。可选用电子送经、电子牵拉，使织物的送经更加稳定。

技术参数

针型	舌针
机号	E16, E18, E22
工作门幅	90", 100", 110", 138"
梳栉数	5
双面毛高	6-20 mm
主传动	油浸式凸轮传动
机器转速	700 rpm
横移机构	N型提花装置，链块或者花盘(选配：电子横移)
送经装置	两辊罗拉式积极送经(选配：电子送经)
织物牵拉	变换齿轮牵拉箱体(选配：电子牵拉)
卷取装置	独立卷取装置
主电机功率	2.2 kw (90", 100", 110") 3 kw (138") (根据客户要求定制)



MFSM-288A double bar (villi, linter) warp knitting machine

Use

Cloth finishing, cutting later, Capable of forming a pile height of 5-25mm in velvet fabric. Plush line combined into a circle, Hair fullness, comfort, Not easy to come off from the bottom cloth, Widely used in plush toys, fur coats, rugs, blankets and other plush products, such as law Levin, coral cashmere, cashmere unicorn, Loop cashmere, PV cashmere, fur simulation.

Product features

The oil immersed type cam, cam wear, durable. Can choose to send electronic, electronic pull, so that the fabric of the more stable.

Technical parameters

Needle type	needle
Machine number	E16, E18, E22
Work width	90", 100", 110", 138"
Comb number	5
High	6-20 mm double-sided wool
Main drive	oil immersed cam drive
Machine speed	700 rpm
Shogging mechanism	N type jacquard device, or a disk block (optional: ELS)
Send the device	two roller roller type active transmission (optional: electronic delivery)
Pull of the fabric	change the pull box (optional: electronic pull)
Winding device	independent coiling device
Main motor power	2.2 kw (90", 100", 110") 3 kw (138") (customized according to customer requirements)

MFHB-33(43)多梳栉花编机

用途 用于编织各种弹性花边，提花服饰面料及提花装饰织物等。

产品特点

油浸式凸轮，偏心连杆传动机构，底梳和弹性氨纶纱线采用电子送经，织物采用电子卷取。

技术参数

针型	槽针
机号	E18, E24
工作门幅	105", 132"
梳栉数	43把, 41把, 33把
转速	350-400 r/min
主电机功率	3kw
外型尺寸	6167x4100x3430
占地面积	约25.28m ²
送经装置	电子送经4付, 变频无极调速, 电子卷取



MFHB-33 (43) multi comb flower knitting machine

Use Used to knit various kinds of elastic lace, jacquard garment material and decorative fabric etc.

Product features

Oil-immersed cam, eccentric connecting-rod driving mechanism, electronic warp let-off for bottom bar and elastic urethane yarn and electronic winding for fabric.

Technical parameters

Model of Needle	grooved needle
Machine number	E18, E24
Work width	105", 132"
Comb number	43, 41, 33
Machine speed	350-400 r/min
Main motor power	3kw
Outline Dimensions	6167x4100x3430
Occupied Area	约25.28m ²
Send the device	4 pairs of electronic warp let-off device, frequency inverting variable speed and electronic winding

