

>>>> S 棉条桶 LIVER CAN


1. 上口圈、上口箍选用优质硬态不锈钢, 经特殊机械滚轧成型, 确保圆整和抗冲撞强度, 后经特种抛光处理, 永保光滑。
2. 防静电桶身(选用)由HDPE(高密度聚乙烯)加入适量进口抗静电剂混合, 经意大利板材线生产, 确保抗静电功效及时效, 无缝焊接, 平整光滑, 牢固稳定。
3. 弹簧采用65mm优质碳素结构钢, 由自动机械加工成元柱直通形, 并加大上、中、下口径。克服了传统的瘦腰形弹簧倾斜、疲乏的缺陷, 保证了托盘工作承压后平稳及弹簧使用高度不萎缩。承压不减退。大规格棉条桶(Ø500以上)推荐使用升降平衡支架弹簧。
4. 托盘由ABS(奇美757)工程塑料注射成型, 强度高, 耐老化, 平整不变形。
5. 加强型镀锌高箍底盘, 形体稳定, 抗磨抗冲击, 使用寿命长。
6. 滑轮采用我公司专利产品“自清洁棉条桶专用轮”。

1. Up Ring and Up Hoop are made of high quality hardness Stainless Steel, and rolled by special machinery crafts, can ensure the roundness and intensity of anti-bump, and maintain the smooth after special brushing.
2. The antistatic body is made from HDPE material with appropriate antistatic mixture, ensure the antistatic capacity timeliness after Italian material processing, seamless welding, smooth and plane, firmly and stable.
3. The spring material is 65mm High Carbon Element Structure Steel, processes the Hollow Column-shaped by auto-machines, enlarges the up, middle and down diameters size. The products overcome the defect of traditional thin twist spring's inclination and fatigue characters, and guarantee the pallet working stably after bearing pressure and no height atrophy of using spring. The pressure can't decrease anymore. We recommend to use the lift balanced support spring if the large type sliver can ($\geq \varnothing 500$).
4. The pallet is made of ABS (Qimei 757), high intensity, wear-resistance, and plane without deformed.
5. Enhanced-type zinc-plating high hoop chassis owns stable body, wear-resistance and anti-bump, long service life, and polyurethane needle bearing wheel is flexible durable.
6. The wheel adopts our company's patent products "Self-cleaning Fibercon's Special Wheel".

棉条桶规格 SIZE OF SLUVER CANS

单位/Unit:mm

直径	英制 in	9"	10"	12"	14"	16"	18"	20"	24"	28"	32"	36"	40"	54"	60"
	公制 mm	225	250	300	350	400	450	500	600	700	800	900	1000	1350	1500
高度	英制 in	28" ~ 72" (包括脚轮)													
	公制 mm	700~1800 (包括脚轮)													

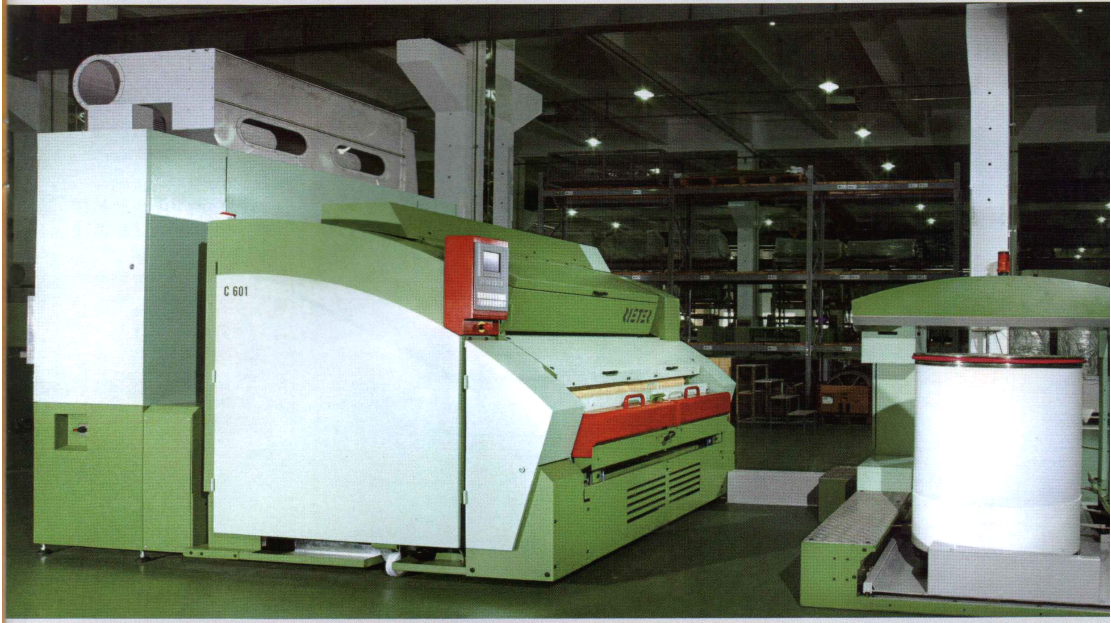


>>>> S 自清洁棉条桶专用滑轮

SELF-CLEANING FIBERCON'S SPECIAL WHEEL

1. 圆锥形外形设计，表面光滑，不易沾花、挂花。
2. 固定轮为高强度优质合金材料压铸成形，绝不变形、不开裂。
3. 运动轮为耐磨性极佳的POM材料，经久耐用，不损伤设备和车间地面。
4. 少量缠绕在滑轮上的废花一旦形成圈状后，经棉条桶移动时固定轮与运动轮之间的窜动，由固定轮外沿圈将废棉圈强行推拦至运动轮下部，废棉圈即自行脱落。
5. 移动变向灵活，大大地减少了车间工人劳动强度，提高了工作效率，节省了生产成本。


1. Conical design, surface smooth, without wounded easily.
2. Fixed wheel adopts die-casting with high intensity and quality alloy material, without deformed and cracking in service life.
3. Sports wheel uses the better wear-resistance POM material, long service life, and can't damage the ground surface the devices and workshop.
4. As soon as a few of wasted fly twisting on the wheel formed the ring-shaped, after moving between fixed and sports wheels when Fibercon transferring, pushing the wasted loop to the sports wheel's bottom by fixed wheel's outside circle, the wasted loop will fall off by itself.
5. Agility moving and changing direction, can decrease the workers' labor intensity in a long way, and improve the working efficiency, and save the producing cost.

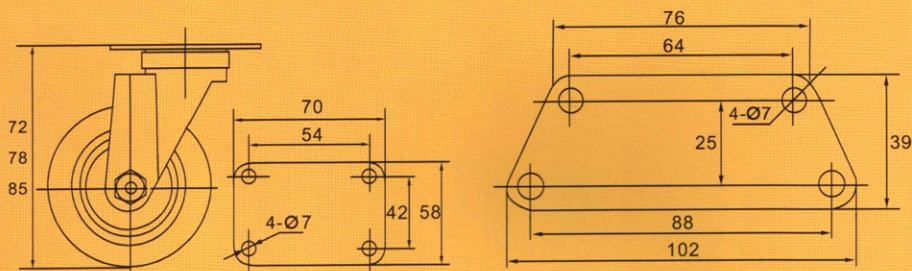

规格型号、安装尺寸


单位/Unit:mm

规格型号	高度	底板尺寸	孔距	孔径
PW-72-C	72	70×58	54×42	7
PW-78-C	78			
PW-85-C	85			
PW-72-C	72	102×76×39	88×64×25	
PW-78-C	78			
PW-85-C	85			

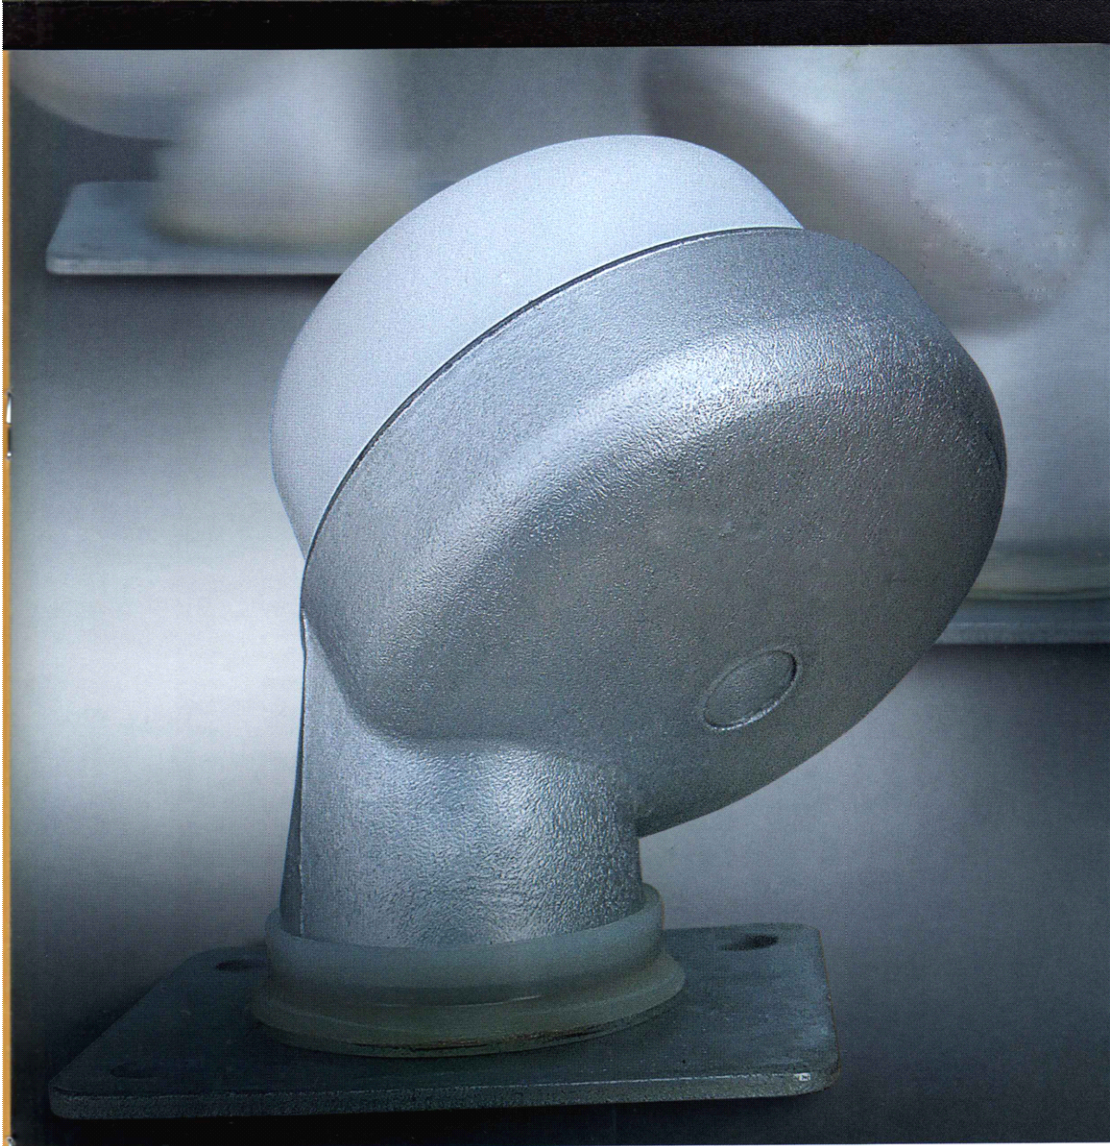

>>>> F 手动纺织清洁捻枪 FEATURES OF MANUAL TEXTILE CLEAN TWIST GUN

1. 手动纺织清洁捻枪（绒毛清洁剂）由我公司在国内首家开发生产并取得四项专利。
 2. 手动式惯性贮能动力、节能、环保、安全、方便、适合任何场合使用，文明生产，减轻劳动强度，提高工作效率，减少纱疵断头、提高成纱品质。
 3. 选用优质钢材，淬火处理，涡轮蜗杆结构、反应灵敏、可靠稳定，多种规格，供需要选择：200mm适用细纱，300mm适用粗纱，400mm、500mm适用梳棉、并条、600mm、700mm、800mm、900mm、1000mm适用于导架及设备深处清洁，除清洁枪杆外，其它部件通用。
 4. YF-2型体积小，重量轻，起速快，更称手，更轻松、更方便、更适合细纱工序使用。
 5. YF-2型（针式）更适合清洁间隙较小处，如胶辊、胶圈等间隙部位。
 6. YF-3型是在YF-1型基础上改进提升的新一代产品，壳体加强，采用凹凸槽并对内置两端轴承封闭，有效防止飞花毛羽侵入，将原扭曲式弹簧改进成张力拉伸弹簧，在根本上克服了原弹簧易断裂的顽症，有效的提高了产品质量和使用寿命。
1. Manual Textile Cleaning Puttygun (Floss Cleaner) is developed and produced by our company firstly, and attained four patents.
 2. Manual inertia store the energy, saving power, green, safe, convenient, apply to the anywhere, regular producing, decrease the labor intensity, reduce the cotton broken yarn, increase the yarn quality.
 3. Adopt the high grade steel material, quench treatment, turbo and whorl structure, acute reaction, reliable and stable, various specification, and choose according to requirements: 200mm applied yarn, 300mm applied roving, 400mm, 500mm applied combing, draw, 600mm, 700mm, 800mm, 900, 1000mm apply to guide support and equipments' deeper cleaning, except for cleaning gun, other components are all-purpose.
 4. Type YF-2 is small bulk, light weight, rapid start, use easily, more convenient, applies to yarn programs
 5. Type YF-2 (needle) applies to clean the little gap, like apron, circle's gap location.
 6. Type YF-3 is developed and improved on base of Type YF-1, reinforce the shell, adopt the concave and protruding groove, and set bearing's two ends' closing, can prevent the fly and feather invade inside efficiently, make the distort spring change into the tension type, can solve the persistent problem of spring easy rupture.

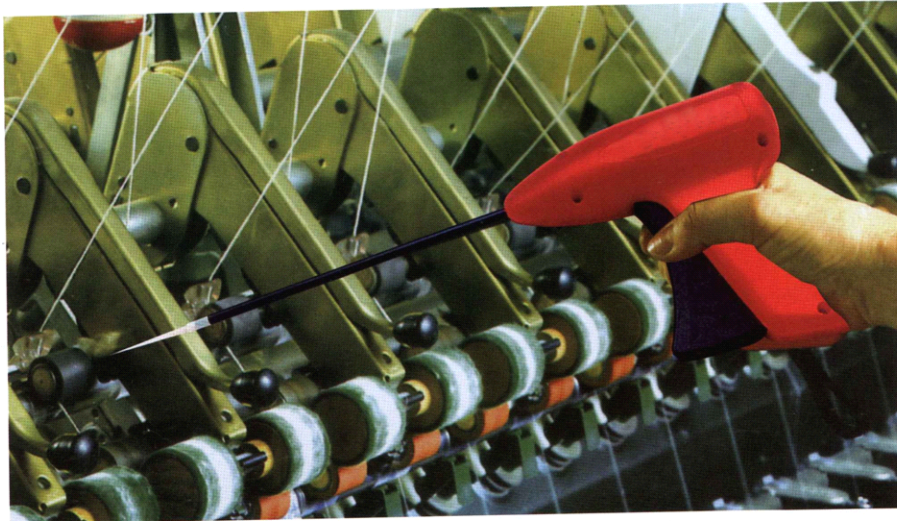




YF-1型



YF-2型



YF-2型 (针式)

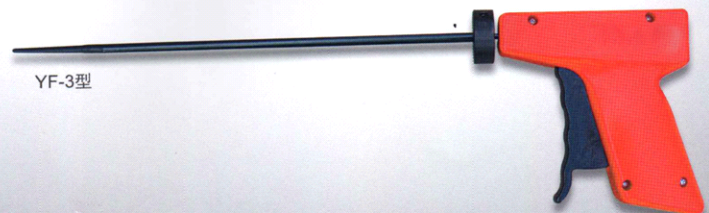

YF-3型

>>>> C 充电式电动清洁捡枪 CHARGE ELECTRIC CLEANING PUTTY GUN

无需电源引线，可充式锂离子电池供电，智能充电器，简便、安全。

性能、参数：

1. 充电电压：100v-240v
2. 电流：90mA（空载）、150-200mA（工作）
3. 电池容量：2000mAh
4. 连续运转： ≥ 8 h
5. 电机：3.6v（高速）
6. 电池：可充式锂离子电池

注意：第一次使用应完全充放电，不能用其它充电器代用。

Without power supply down-lead, Charge lithium battery power supply, aptitude charger, convenient and safe.

Characters, parameters:

1. Charge Voltage: 100v-240v
2. Currency: 90mA (no work), 150-200mA (Work)
3. Battery Capacity: 2000mAh
4. Continual running: ≥ 8 h
5. Motor: 3.6v (high speed)
6. Battery: Charge lithium battery

Note: Fist using, please charge and discharge thoroughly, forbidden replace of other charger.



